




WATERITE TECHNOLOGIES, INC.
3-75 Meridian Drive
Winnipeg, MB
Canada R2R 2V9
PHONE: (204) 786-1604
FAX: (204) 783-1599
waterite@waterite.com
www.waterite.com

**WATERITE TECHNOLOGIES, INC.
PRODUCT SPECIFICATION SHEET
FIL-GAC-002R1**

ACTIVATED CARBON FILTER CARTRIDGE

TYPE:	2 7/8" cartridges for 20" standard housings
FEED:	Municipal or well water
FEED PRESSURE:	150 PSI maximum
TEMP. RANGE:	4.7°C to 50°C
CAPACITY:	38,000 L @ 7.6 LPM (chlorine reduction @ 2ppm, >90% reduction)
MICRON RATING:	5 micron nominal
COLOUR:	blue with white end cap
BODY MATERIAL:	Cartridge body: Food grade polystyrene thermoplastic resin Internal packing: spun polypropylene All materials conform to NSF 42 for material requirements only
CARBON:	20/50 mesh activated coconut shell
GASKET:	BUNA-N, low durometer
MODEL:	Excelpure GAC-20

APPROXIMATE ΔP :

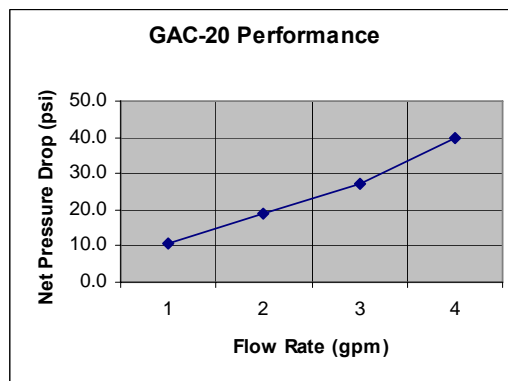

Excelpure



SPEC FIL-GAC-002R1
July, 2005